

PST21A 1200W

AC-DC Conduction cooled



Features

- ▶ 85-264Vac or 120-350Vdc input voltage ranges
- ▶ 1-6 isolated outputs up to 1200W
- ▶ 255*127*40mm very low profile
- ▶ Power Factor Correction EN61000-3-2
- ▶ Active very low inrush limitation
- ▶ Surge and transient protection
- ▶ Many output configurations available
- ▶ Conduction cooled 100°C baseplate. No derating.


Description

The PST21A, very compact and low profile AC-DC power supply up to 1200W in chassis format, incorporates input filtering, input and output protections, very robust mechanical mounting and connection, conformal coating and MIL-STD options required in most of the severe environment for industrial, defense applications. The psu provides high reliability thanks to the integration of Vicor Corp. modules, high efficiency, input-to-output isolation, soft start and *active very low inrush circuit*, overtemperature protection, input over/undervoltage lockout. The psu is configurable with 1 to 6 outputs in many output voltages from 2V to 54Vdc, other outputs are even possible as semi-standard versions. They are continuously short-circuit proof. The 100°C baseplate allows operation in high temperature environment.

Safety IEC/EN 62368-1, RoHS lead-free-solder compliant



Bloc diagram

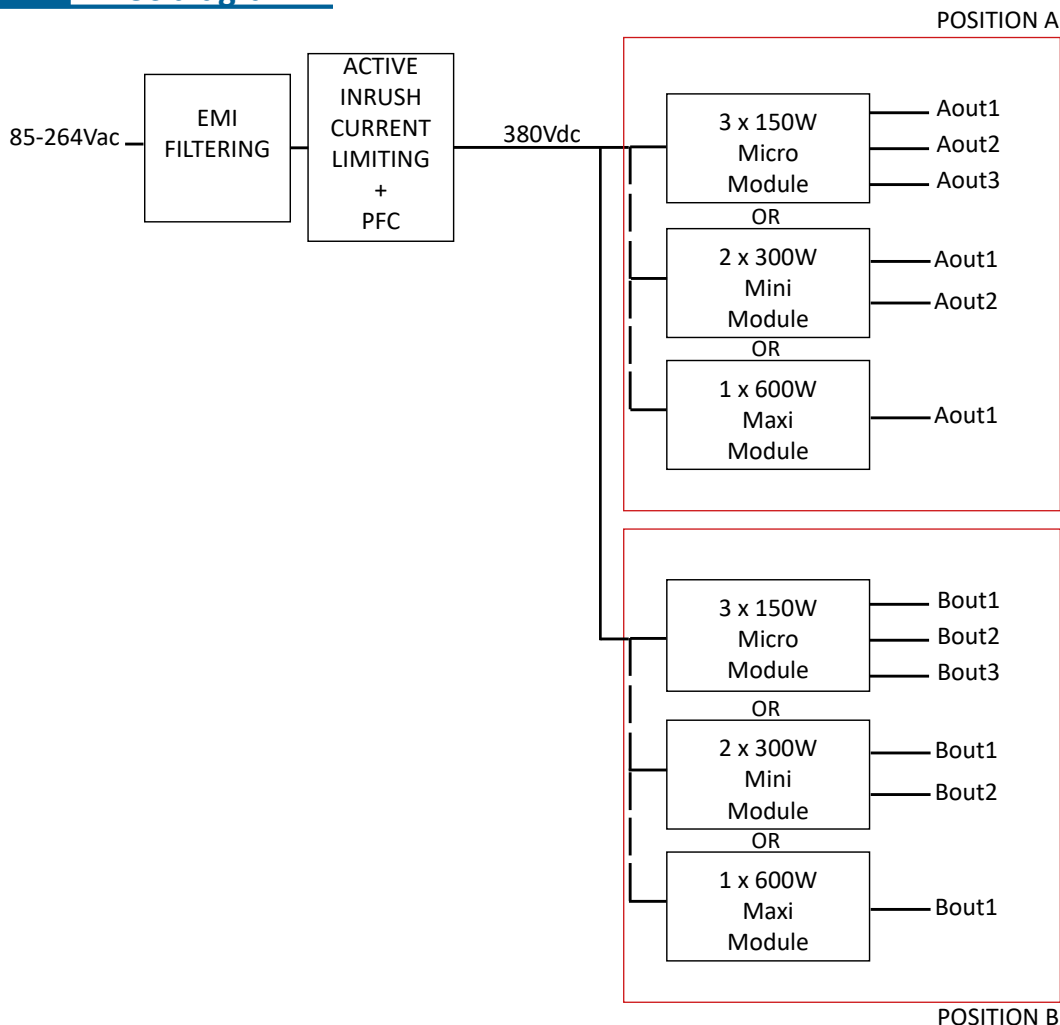

Options Description

MIL-STD ruggedized (-M)

Meet MIL-STD 461E CE102, MIL-STD 1399-300A, MIL-STD810E shock & vibrations. No Laboratory certification.

-40°C operation (-T)

The thermal grade of the Vicor the DC/DC converters used and other components are changed to comply with low ambient temperature.

Conformal coating (-V)

During manufacturing process , when V option is specified, components and pcb are covered with an acrylic coating to address high level of ambient humidity application.

Heatsink (-H, -H1)

-H: a 15 mm heatsink is mounted on the baseplate with longitudinal fins.
-H1: a 15 mm heatsink is mounted on the baseplate with transversal fins.

Input

Electrical Input Data

| Input | | | | | Unit |
|-------------------------|---------------------|-----|------|------|------|
| Characteristics | Conditions | min | typ | max | |
| Operating input voltage | | 85 | | 264 | Vac |
| Operating input voltage | | 120 | | 350 | Vdc |
| Frequency | | 44 | 50 | 440 | Hz |
| Power Factor | 230Vac, 50Hz, Pnom. | | 0,96 | 0,98 | |
| Input current | At Vin min | | | 16 | A |
| No-load input power | At Vin typ | | 15 | | W |
| Peak inrush current | Vin max | | 4 | | A |
| Start-up time | | | 3 | | s |

Input Fuse


A fuse mounted inside the psu protects against damages in case of a failure. The fuse is not user-accessible without opening the unit. In DC mode, reverse polarity at the input is protected and will not cause the fuse to blow .

| Model | Fuse type | Rating | Reference |
|--------|------------|--------|-------------|
| PST21A | Littlefuse | 15A | 0218015.MXP |


Input Transient Protection

A VDR (Voltage Dependent Resistor) and a common mode input filter form an effective protection against input transients in severe environments.


Establishment time curve at 230Vac - PST21A-5300-48150-550-3V375

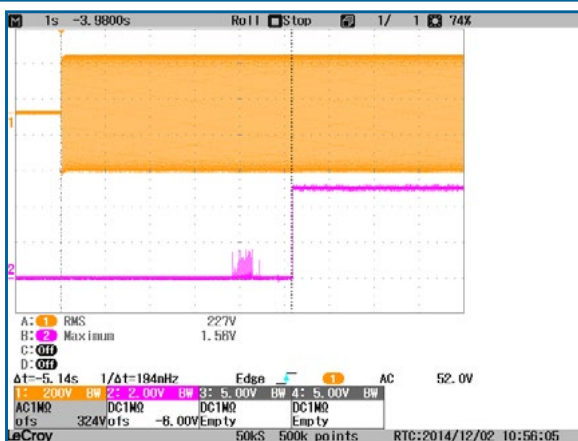


Efficiency curve - PST21A-5300-48150-550-3V375

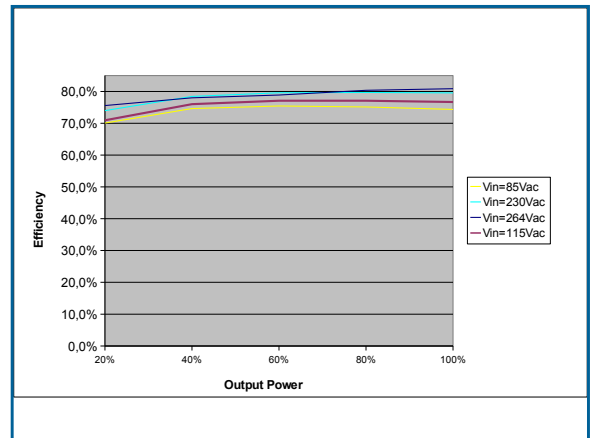

Power factor curve - PST21A-5300-48150-550-3V375

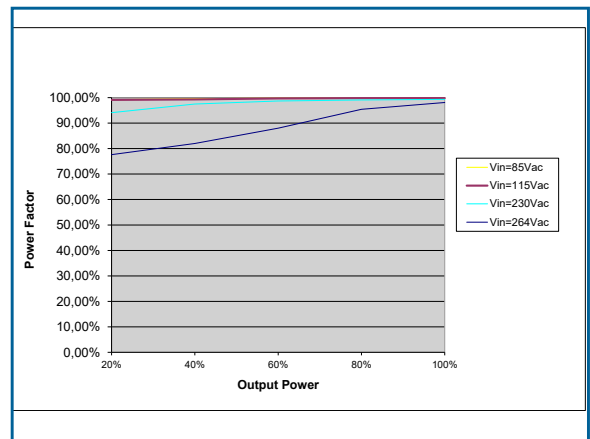

Establishment time curve at 115Vac - PST21A-5300-48150-550-3V375

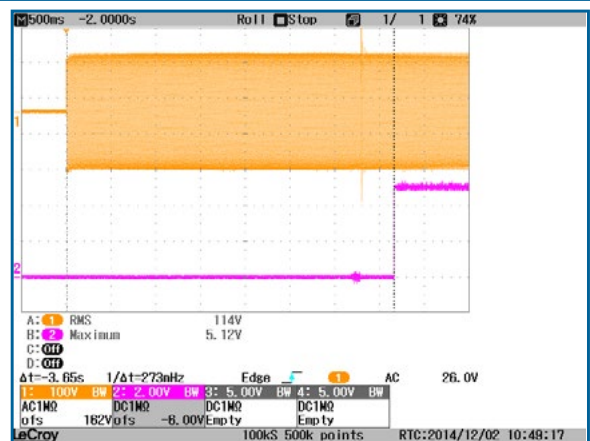

Output

Electrical Output Data

General conditions : 25°C ambient. For each output voltage max power configuration.

| PST21A can be equipped with up to two boards of the models below (mix possible example 1 Maxi board + 1 Micro board) | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|-----|-----|------|-----|-----|-----|------|------|------|------|-----|------|------|------|------|------|------|------|------|-----|------|------|
| Output | | 3V3 | | | 5V | | | 12V | | | 15V | | | 24V | | | 28V | | | 48V | | | Unit |
| Characteristics | Conditions | min | typ | max | min | typ | max | min | typ | max | min | typ | max | min | typ | max | min | typ | max | min | typ | max | |
| Output voltage | | | 3V3 | | | 5 | | | 12 | | | 15 | | | 24 | | | 28 | | | 48 | V | |
| Trim range | Factory set | 3 | | 3,6 | 4,5 | | 5,5 | 10,8 | | 13,2 | 13,5 | | 16,5 | 21,6 | | 26,2 | 25,2 | | 30,8 | 43,2 | | 51,8 | V |
| Overvoltage protection | | | | 4,5 | | | 6,5 | | | 14,9 | | | 18,5 | | | 29,1 | | | 34 | | | 58 | V |
| Output noise | 20MHz | | 75 | | | 75 | | | 100 | | | 100 | | | 100 | | | 100 | | | 150 | mVpp | |
| Efficiency | | | 75 | | | 83 | | | 85 | | | 84 | | | | | | 83 | | | 84 | % | |
| Load Regulation | Vin nom. | | | 1 | | | 1 | | | 0,5 | | | 0,5 | | | 0,4 | | | 0,4 | | | 0,4 | % |
| Double Maxi Board (2M) | Each board includes 2 identical Maxi modules in parrallel for high power configuration | | | | | | | | | | | | | | | | | | | | | | |
| Output current | | 0 | | 160 | 0 | | 160 | 0 | | 100 | 0 | | 80 | 0 | | 50 | 0 | | 43 | 0 | | 25 | A |
| Max. power | | | | 528 | | | 800 | | | 1200 | | | 1200 | | | 1200 | | | 1200 | | | 1200 | W |
| Output current limit | | | 184 | 208 | | 184 | 208 | | 115 | 135 | | 92 | 112 | | 58 | 78 | | 48 | 58 | | 28 | 34 | A |
| Maxi Board (M) | Each board includes 1 Maxi module below | | | | | | | | | | | | | | | | | | | | | | |
| Output current | | 0 | | 80 | 0 | | 80 | 0 | | 50 | 0 | | 40 | 0 | | 25 | 0 | | 21,5 | 0 | | 12,5 | A |
| Max. power | | | | 264 | | | 400 | | | 600 | | | 600 | | | 600 | | | 600 | | | 600 | W |
| Output current limit | | | 92 | 104 | | 92 | 108 | | 57,5 | 67,5 | | 46 | 56 | | 29 | 39 | | 24 | 29 | | 14 | 17 | A |
| Mini Board (m) | Each board includes up to 2 Mini modules below | | | | | | | | | | | | | | | | | | | | | | |
| Output current | | 0 | | 45 | 0 | | 40 | 0 | | 25 | 0 | | 20 | 0 | | 12,5 | 0 | | 10,7 | 0 | | 6,25 | A |
| Max. power | | | | 150 | | | 200 | | | 300 | | | 300 | | | 300 | | | 300 | | | 300 | W |
| Output current limit | | | 54 | 64 | | 46 | 52 | | 29 | 35 | | 23 | 26 | | 14,5 | 17 | | 12,5 | 14,5 | | 7,2 | 8,2 | A |
| Micro Board (μ) | Each board includes up to 3 Micro modules below | | | | | | | | | | | | | | | | | | | | | | |
| Output current | | 0 | | 22,7 | 0 | | 20 | 0 | | 12,5 | 0 | | 10 | 0 | | 6,25 | 0 | | 5,3 | 0 | | 3,1 | A |
| Max. power | | | | 75 | | | 100 | | | 150 | | | 150 | | | 150 | | | 150 | | | 150 | W |
| Output current limit | | | 25 | 31 | | 23 | 26 | | 14,5 | 17 | | 11 | 14 | | 7,2 | 8,2 | | 6,2 | 7 | | 3,6 | 4,4 | A |

See "options and configurations" section for all the power possibilities.

Parallel operation & current share

Parallel operation is possible in the same unit or between different units for Miniboards, Maxiboards and Dual Maxiboards with active current sharing through the PR signal. The outputs put in parallel **MUST** be exactly the same, all OUT+ connected together and all OUT- connected together when PR are linked (risk of damage otherwise).

Redundant Systems Operation

When systems require a very high level of reliability and should work normally in the event of a failure, N+1 redundancy is implemented where N is the number of converter to support power requirement. If one converter fails, the remaining ones still delivers the power to the loads.

Redundant operation requires external oring diodes.

Hold-up time

The psu provides internal hold-up time.

Output Current Limitation

All outputs are continuously protected against short-circuit by a constant current limitation (no foldback) with automatic recovery. See Page 2 for the value.

Thermal Considerations

When a converter is mounted in conduction cooled, the temperature measured on the baseplate should not exceed 100°C. When heatsink option is used in convection cooling and is operating at its nominal output power at the max. ambient temperature, the temperature measured on the heatsink should not exceed 100°C.

Thermal protection

A temperature protection (OTP) is integrated in each output module, disabling output when baseplate temperature exceeds 105°C (+/-5°C). The converter automatically restarts, when the temperature drops below 70°C. Nevertheless, exceeding the max operating temperature may cause failures of the converter.

Overvoltage protection

An OVP is incorporated on each output. All outputs are cut if an OVP is detected. This protection is latch style (Recovery after AC reset or inhibit).

Auxiliary Functions


Remote On/Off (INHIB)

An isolated INHIB signal disables corresponding output voltage when connected to RTN. - outputs inhibited : INH level LOW


Output Voltage Adjustment (ADJ)

Output can be adjusted 90-110%Vnom. with the potentiometer at the output side or by an external voltage 0,6 to 1,25V max. referred to S1-.


Input Power Break - PST21A-5300-48150-550-3V375

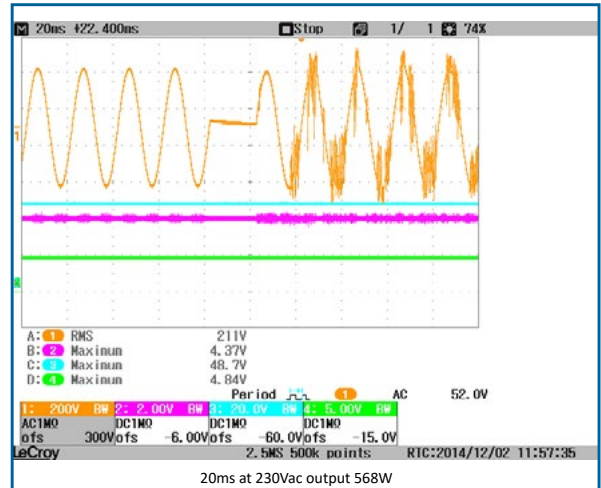

Inrush current at 115Vac - PST21A-5300-48150-550-3V375

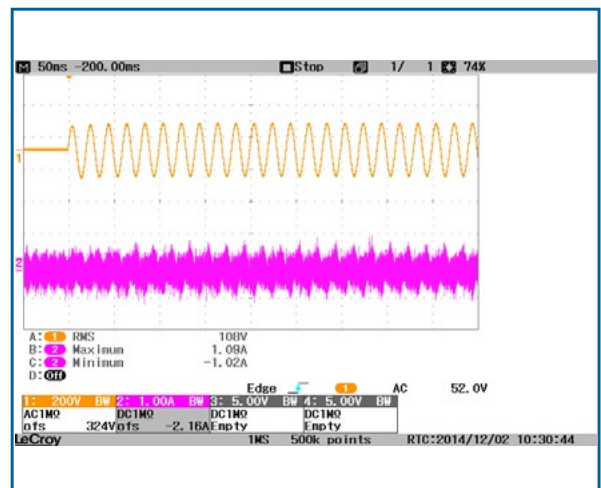

Inrush current at 230Vac - PST21A-5300-48150-550-3V375

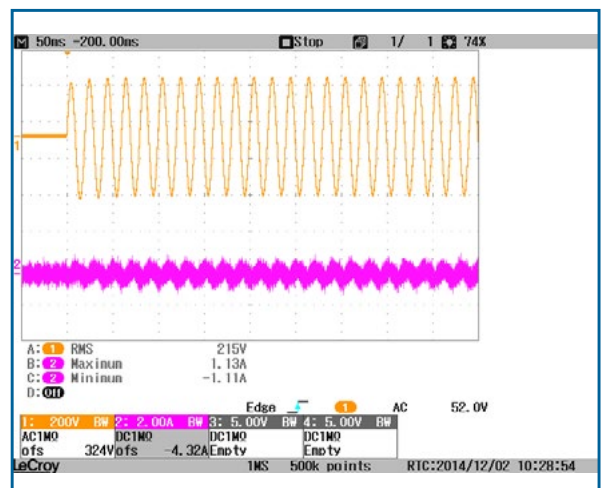

Remote Senses (+S -S)

This feature enables compensation of voltage drop across the connector contacts and the load lines. Remote Sense, max 0,5V per line compensation (If local sense, connect locally S+ to OUT+ and S- to OUT- of the corresponding output). Senses are not included on Microboard.

| Output type | Total drop | Positive line drop |
|-------------|------------|--------------------|
| V1, V2 | < 0.5V | < 0.25V |

PowerGood & LED

Collector isolated optocoupled signal referred to RTN, closed when all outputs voltages are OK. Led is also available for each output.


Auxiliary bias voltage (+5VAUX)

Auxiliary supply limited to 200mA. Referred to RTN

Paralleling signal (PR)


Parallel only identical outputs (voltage and power). Outputs in parallel will current share when their corresponding PR are connected together. When outputs are coming from different boards, RTN have to be connected together.

Derating

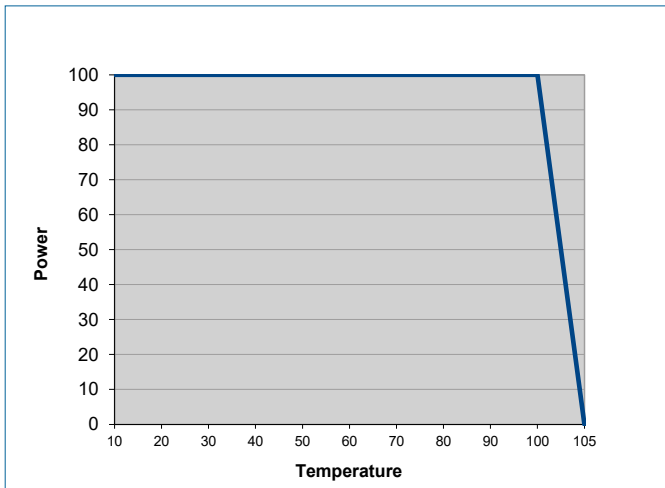


Waveforms

output noise - PST21A-5300-48150-550-3V375

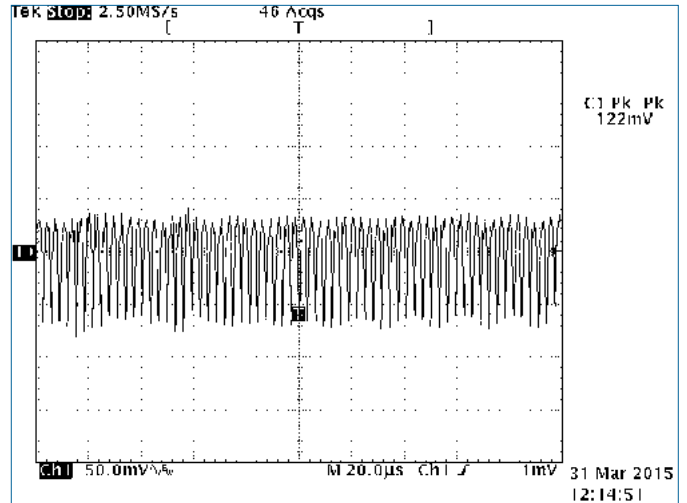

output noise - PST21A-48600-48600-M

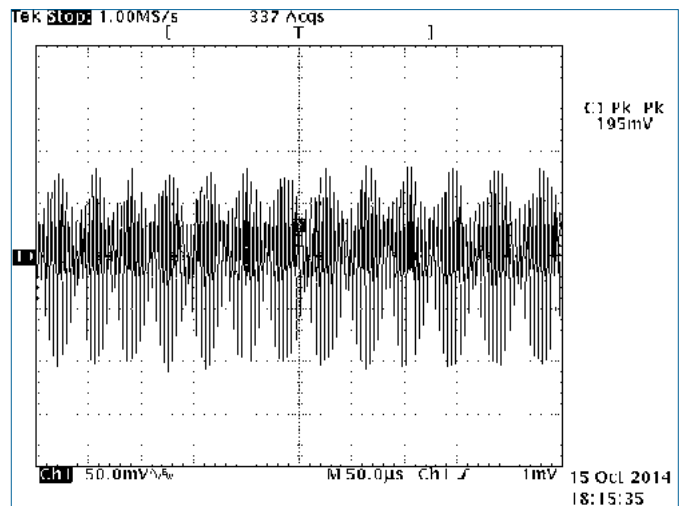

Electromagnetic

Electromagnetic Immunity


| | | Standard | | Level | Value | Waveform | Source imped. | Test procedure | Mode | Criteria |
|-----------------------------------|---------------|--------------|-----|-------|-------|------------------|---------------|-----------------|------|----------|
| Surges | Built to meet | EN 61000-4-5 | DM | 3 | 1KV | 1,2 / 50 μ s | 12 ohms | | OP | B |
| | | | CM* | | 2KV | 1,2 / 50 μ s | 12 ohms | | OP | A |
| Electrostatic discharge (to case) | Built to meet | EN 61000-4-2 | | 4 | 8000V | 1 / 50 μ s | 330 Ohms | 10 pos., 10neg. | OP | B |
| Electrical fast transients/burst | Built to meet | EN 61000-4-4 | | 4 | 4000V | 5 / 50 μ s | 50 ohms | | OP | B |

Note : Built to meet EN 61000-4 -3, -6, -11, Harmonics EN 61000-3-2, Flickers EN 61000-3-3


* 2 mini board not compliant with 2kv common mode

Electromagnetic Emissions


According to EN55022A/B for PST21A-48600-48600 at 115Vac IN/800W

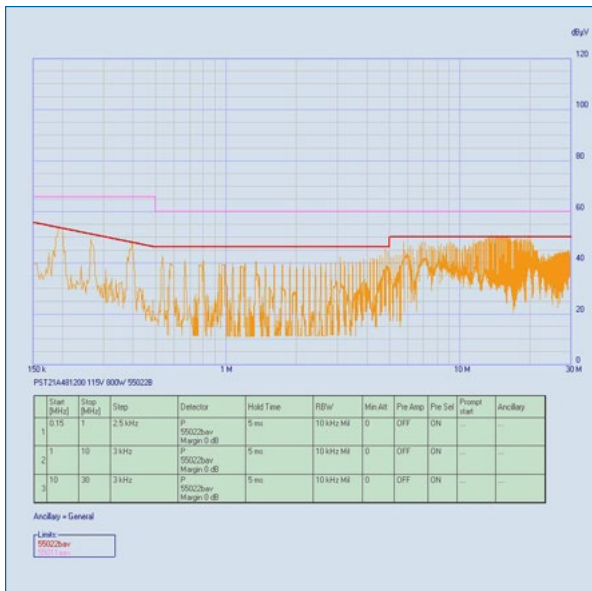

According to EN55022A/B for PST21A-48600-48600 at 230Vac IN/1200W

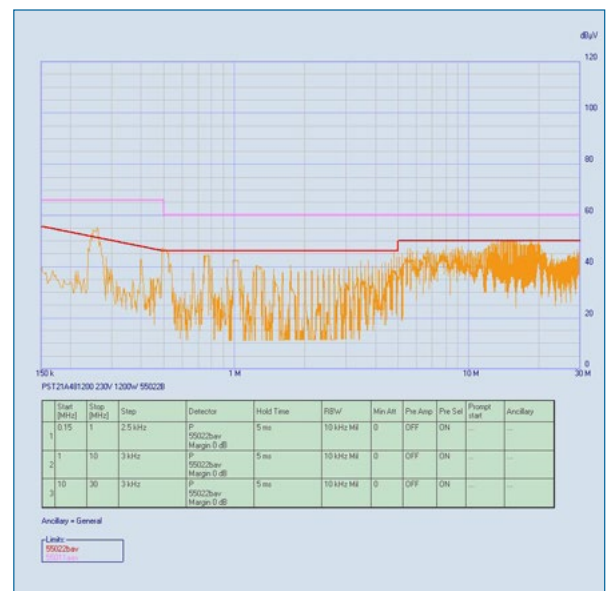

According to MIL-STD461E CE102 PST21A-48600-48600-M at 220Vac IN/800W

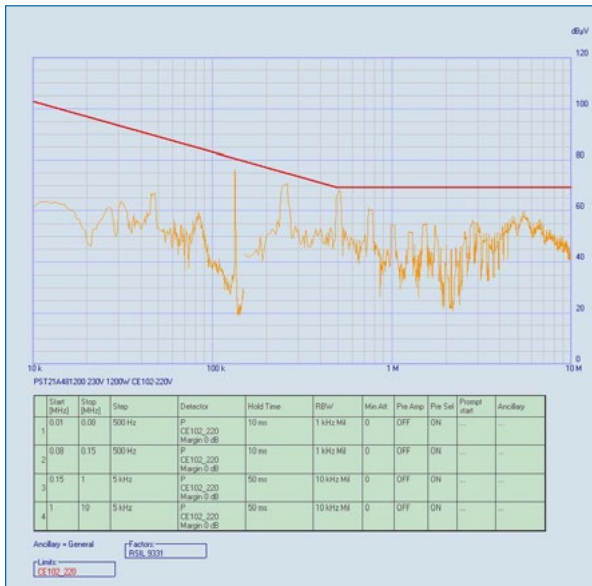


Immunity to Environmental Conditions


| Test method | Standard | Test conditions | Status |
|-------------|--------------------------|---|----------------------------|
| Damp Heat | MIL STD 810F Proc. 507-2 | Humidity 93 %, 40°C, 56 days | Option (-V), built to meet |
| Shock | MIL STD 810F Proc.516.3 | 20g / 18ms half size 5g / 30ms | Option (-M), built to meet |
| Vibrations | MIL STD 810F Proc. 514-5 | 4-80Hz (2,8m/s ²)/Hz, non operating 160-500Hz (0,175m/s ²)/Hz, non operating | Option (-M), built to meet |

Mechanical data


Size : 255 x 127 x 40 mm
 Aluminum Natural
 Weight : 1500g - without heatsink

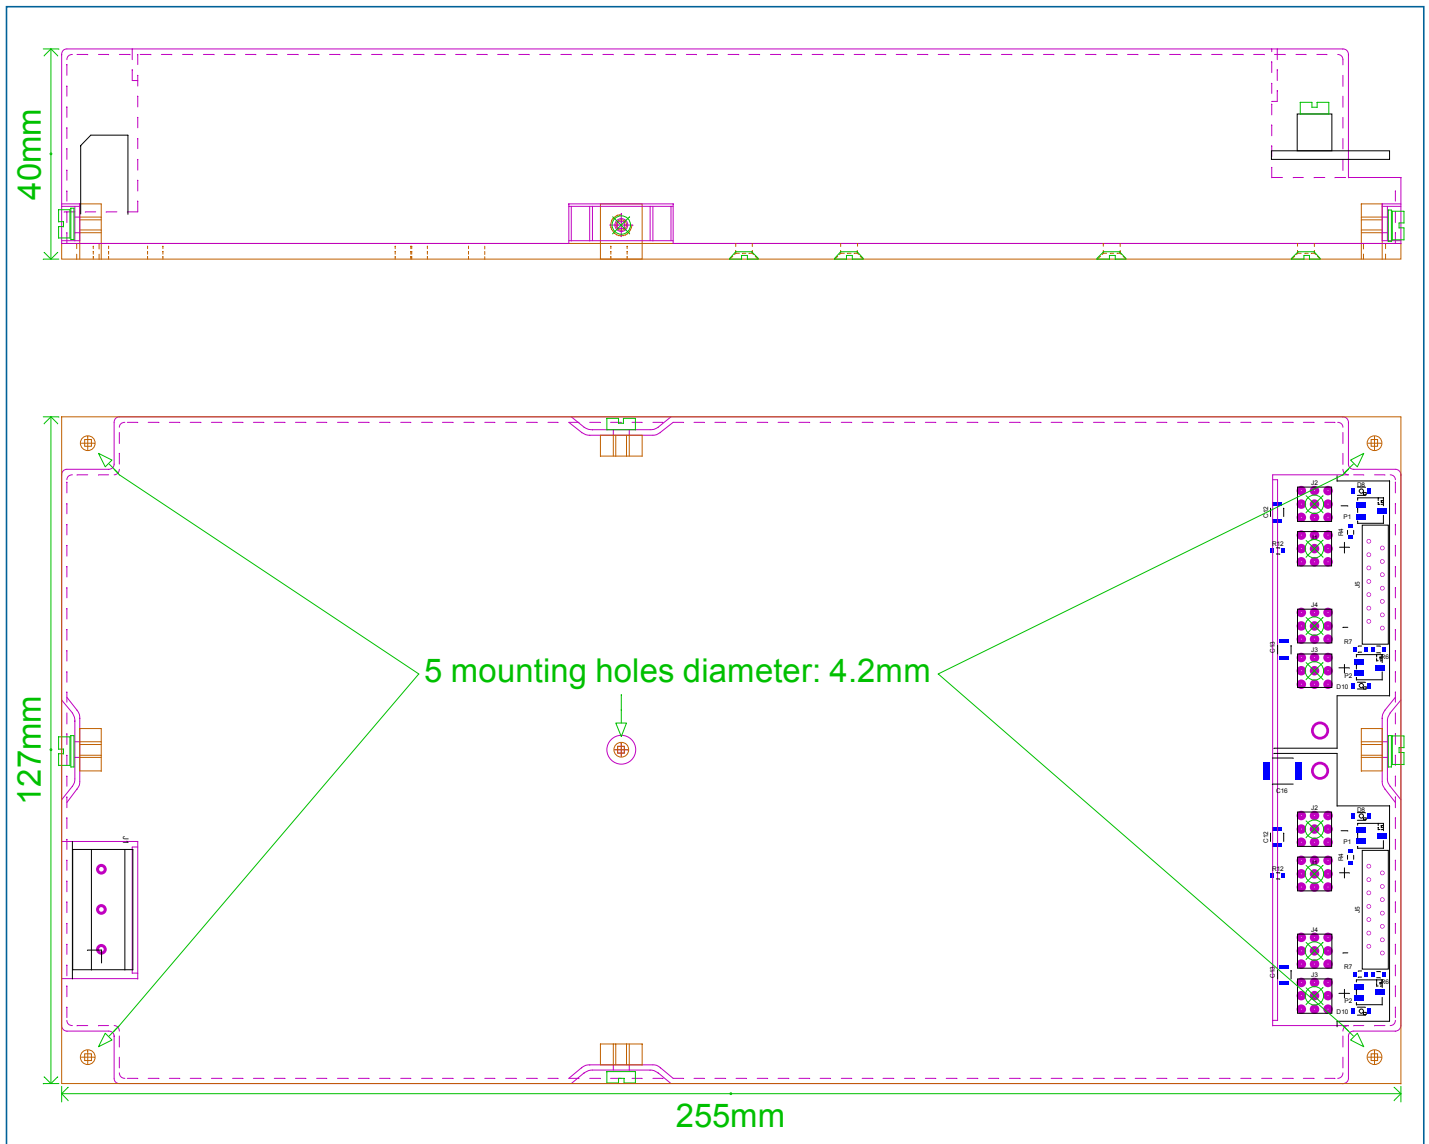


PST21A - H option

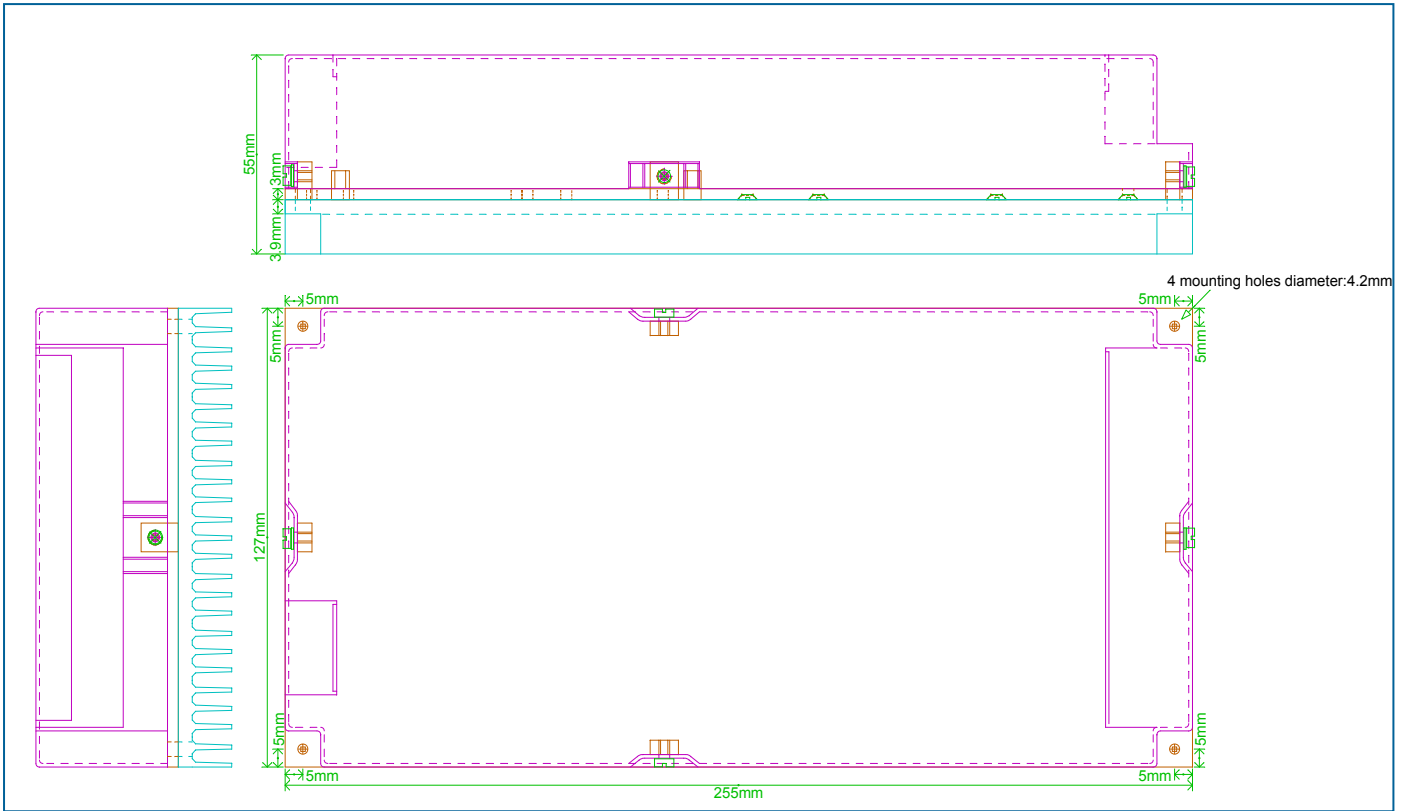



PST21A - H1 option

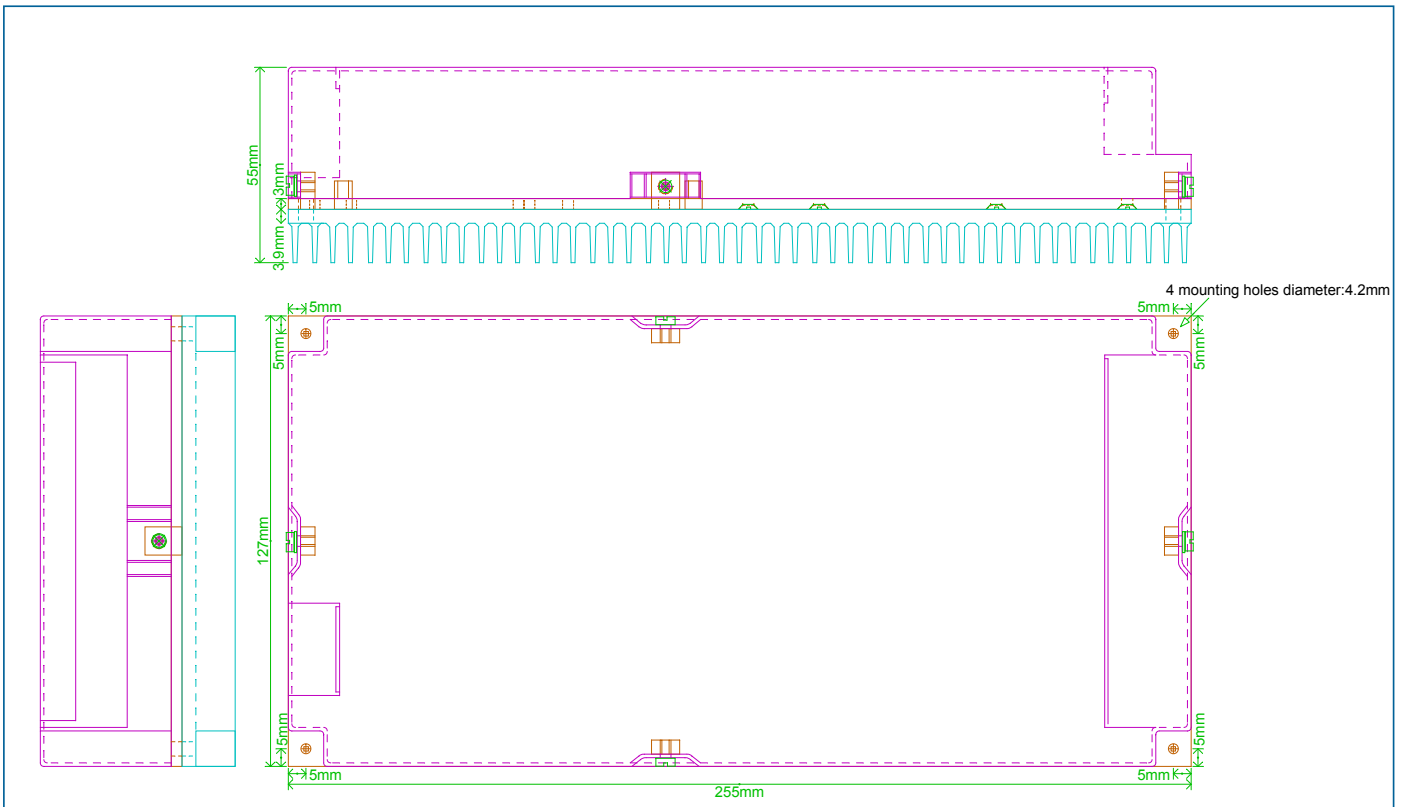



PST21A - IP option

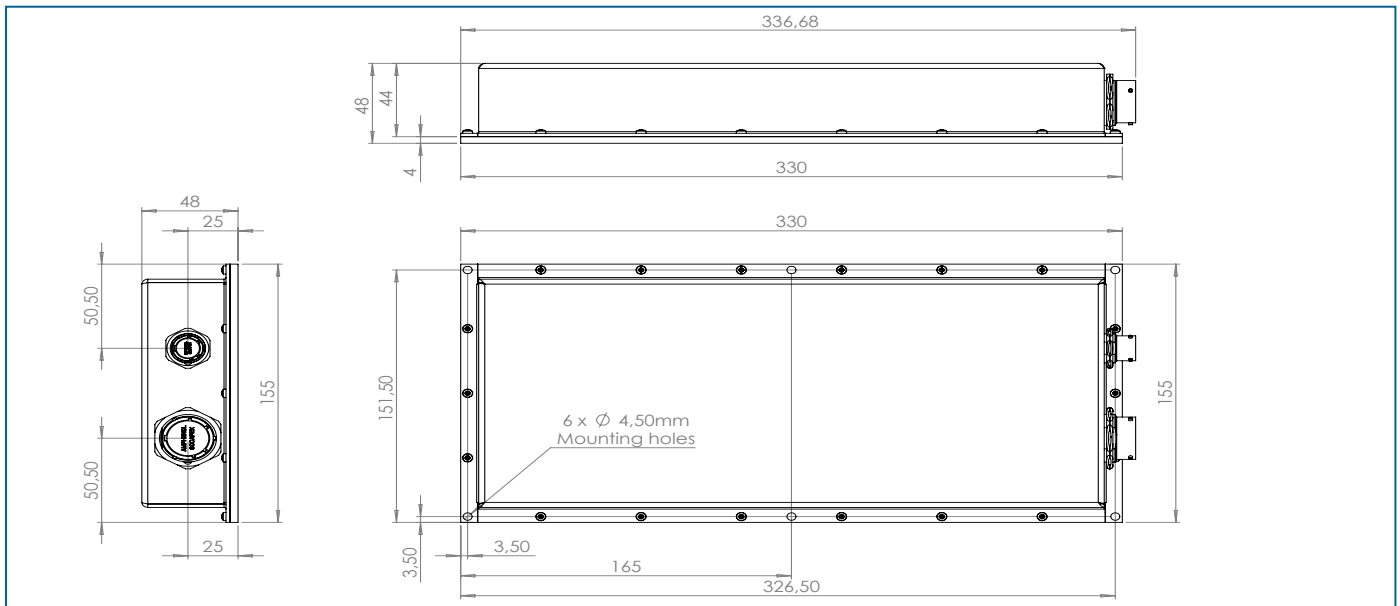


Connector Pin Allocation(-IP version)

| INPUT | | Lang | |
|---|---|------|-------------|
| Connecteurs | Type | PIN | Description |
| J1 INPUT |  | A | NC |
| | | B | AC / L |
| | | C | Earth |
| | | D | AC / N |
| | | E | TERRE |
| | | F | TERRE |
| OUTPUT DUAL MAXI BOARD (1 output 90A max.) | | | |
| J2 OUTPUT |  | A | OUTPUT + |
| | | B | OUTPUT + |
| | | C | OUTPUT + |
| | | D | OUTPUT + |
| | | E | OUTPUT + |
| | | F | OUTPUT + |
| | | G | OUTPUT + |
| | | H | OUTPUT + |
| | | J | OUTPUT + |
| | | K | OUTPUT + |
| | | L | OUTPUT + |
| | | M | OUTPUT + |
| | | N | OUTPUT - |
| | | P | OUTPUT - |
| | | R | OUTPUT - |
| | | S | OUTPUT - |
| | | T | OUTPUT - |
| | | U | OUTPUT - |
| | | V | OUTPUT - |
| | | W | OUTPUT - |
| | | X | OUTPUT - |
| | | Y | OUTPUT - |
| | | Z | OUTPUT - |
| | | a | OUTPUT - |
| | | b | INHIB |
| | | c | RTN |

| OUTPUT 2* MAXI BOARD (2 Outputs 45A max.) | | Lang | |
|---|---|------|-------------|
| Connecteurs | Type | PIN | Description |
| J2 OUTPUT |  | A | OUTPUT1 A + |
| | | B | OUTPUT1 A + |
| | | C | OUTPUT1 A + |
| | | D | OUTPUT1 A + |
| | | E | OUTPUT1 A + |
| | | F | OUTPUT1 A + |
| | | G | OUTPUT2 B + |
| | | H | OUTPUT2 B + |
| | | J | OUTPUT2 B + |
| | | K | OUTPUT2 B + |
| | | L | OUTPUT2 B + |
| | | M | OUTPUT2 B + |
| | | N | OUTPUT1 A - |
| | | P | OUTPUT1 A - |
| | | R | OUTPUT1 A - |
| | | S | OUTPUT1 A - |
| | | T | OUTPUT1 A - |
| | | U | OUTPUT1 A - |
| | | V | OUTPUT2 B - |
| | | W | OUTPUT2 B - |
| | | X | OUTPUT2 B - |
| | | Y | OUTPUT2 B - |
| | | Z | OUTPUT2 B - |
| | | a | OUTPUT2 B - |
| | | b | INHIB |
| | | c | RTN |






| OUTPUT 2* MINI BOARD (4 Outputs 22,5A max.) | | Lang | |
|---|---|------|-------------|
| Connecteurs | Type | PIN | Description |
| J2 OUTPUT |  | A | OUTPUT1 A + |
| | | B | OUTPUT1 A + |
| | | C | OUTPUT1 A + |
| | | D | OUTPUT2 A + |
| | | E | OUTPUT2 A + |
| | | F | OUTPUT2 A + |
| | | G | OUTPUT1 B + |
| | | H | OUTPUT1 B + |
| | | J | OUTPUT1 B + |
| | | K | OUTPUT2 B + |
| | | L | OUTPUT2 B + |
| | | M | OUTPUT2 B + |
| | | N | OUTPUT1 A - |
| | | P | OUTPUT1 A - |
| | | R | OUTPUT1 A - |
| | | S | OUTPUT2 A - |
| | | T | OUTPUT2 A - |
| | | U | OUTPUT2 A - |
| | | V | OUTPUT1 B - |
| | | W | OUTPUT1 B - |
| | | X | OUTPUT1 B - |
| | | Y | OUTPUT2 B - |
| | | Z | OUTPUT2 B - |
| | | a | OUTPUT2 B - |
| | | b | INHIB |
| | | c | RTN |

| OUTPUT 2* MICRO BOARD (6 Outputs 15A max.) | | Lang | |
|--|---|------|-------------|
| Connecteurs | Type | PIN | Description |
| J2 OUTPUT |  | A | OUTPUT1 A + |
| | | B | OUTPUT1 A + |
| | | C | OUTPUT2 A + |
| | | D | OUTPUT2 A + |
| | | E | OUTPUT3 A + |
| | | F | OUTPUT3 A + |
| | | G | OUTPUT1 B + |
| | | H | OUTPUT1 B + |
| | | J | OUTPUT2 B + |
| | | K | OUTPUT2 B + |
| | | L | OUTPUT3 B + |
| | | M | OUTPUT3 B + |
| | | N | OUTPUT1 A - |
| | | P | OUTPUT1 A - |
| | | R | OUTPUT2 A - |
| | | S | OUTPUT2 A - |
| | | T | OUTPUT3 A - |
| | | U | OUTPUT3 A - |
| | | V | OUTPUT1 B - |
| | | W | OUTPUT1 B - |
| | | X | OUTPUT2 B - |
| | | Y | OUTPUT2 B - |
| | | Z | OUTPUT3 B - |
| | | a | OUTPUT3 B - |
| | | b | INHIB |
| | | c | RTN |

Connector Pin Allocation

| PST21A | | | |
|--|---------------|---------------------------------|-----------------|
| Description | PIN | Connector | |
| Input Screw type connector GMKDS 3/3-7.62 | | | |
| 1 | J1-1 | Earth | |
| 2 | J1-2 | Neutral AC/N | |
| 3 | J1-3 | Line AC/L | |
| Output Dual Maxiboard Power connectors (2M) | | | |
| OUT+ | J1 | Würth Pres Fit M4 Ref : 7461095 | |
| OUT- | J2 | Würth Pres Fit M4 Ref : 7461095 | |
| Output Maxiboard Power connectors (M) | | | |
| OUT+ | J1 | Würth Pres Fit M4 Ref : 7461095 | |
| OUT- | J2 | Würth Pres Fit M4 Ref : 7461095 | |
| Output Miniboard Power connectors (m) | | | |
| OUT1+ | J1 | Würth Pres Fit M3 Ref : 7461093 | |
| OUT1- | J2 | Würth Pres Fit M3 Ref : 7461093 | |
| OUT2+ | J3 | Würth Pres Fit M3 Ref : 7461093 | |
| OUT2- | J4 | Würth Pres Fit M3 Ref : 7461093 | |
| Output Microboard Power connector 6 Pins Male (μ) | | | |
| OUT1+ | J1-1 | WURTH TBL3117691311700006 | |
| OUT1- | J1-2 | | |
| OUT2+ | J1-3 | | |
| OUT2- | J1-4 | | |
| OUT3+ | J1-5 | | |
| OUT3- | J1-6 | | |
| Signals Würth 690368191472 Female Male 2*7 pins | | | |
| MICRO BOARD | MINI BOARD | MAXI BOARD | DUAL MAXI BOARD |
| J5-1 : ACFAIL | J5-1 : ACFAIL | J5-1 : ACFAIL | J5-1 : ACFAIL |
| J5-2 : PGOOD | J5-2 : PGOOD | J5-2 : PGOOD | J5-2 : PGOOD |
| J5-3 : RTN | J5-3 : RTN | J5-3 : RTN | J5-3 : RTN |
| J5-4 : INHIB | J5-4 : INHIB | J5-4 : NC | J5-4 : NC |
| J5-5 : +5VAUX | J5-5 : +5VAUX | J5-5 : +5VAUX | J5-5 : +5VAUX |
| J5-6 : NC | J5-6 : S1+ | J5-6 : NC | J5-6 : NC |
| J5-7 : NC | J5-7 : S1- | J5-7 : NC | J5-7 : NC |
| J5-8 : ADJ1 | J5-8 : ADJ1 | J5-8 : NC | J5-8 : NC |
| J5-9 : NC | J5-9 : PR1 | J5-9 : PR1 | J5-9 : PR1 |
| J5-10 : NC | J5-10 : NC | J5-10 : NC | J5-10 : NC |
| J5-11 : ADJ2 | J5-11 : PR2 | J5-11 : INHIB | J5-11 : INHIB |
| J5-12 : NC | J5-12 : S2+ | J5-12 : S1+ | J5-12 : S1+ |
| J5-13 : NC | J5-13 : S2- | J5-13 : S1- | J5-13 : S1- |
| J5-14 : ADJ3 | J5-14 : ADJ2 | J5-14 : ADJ1 | J5-14 : ADJ1 |

J5

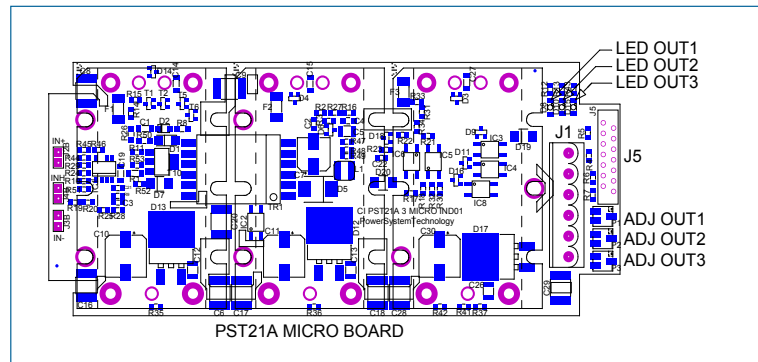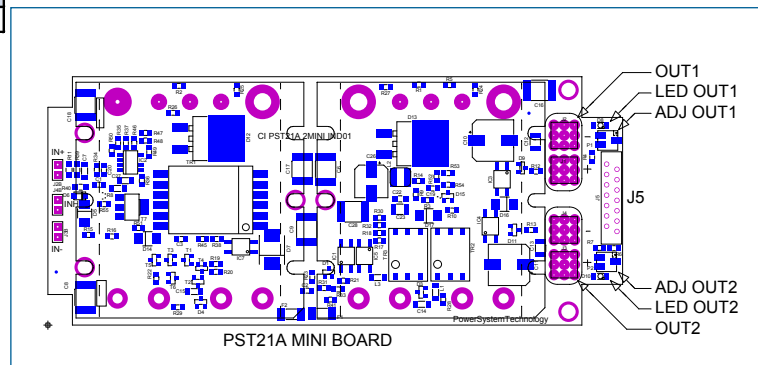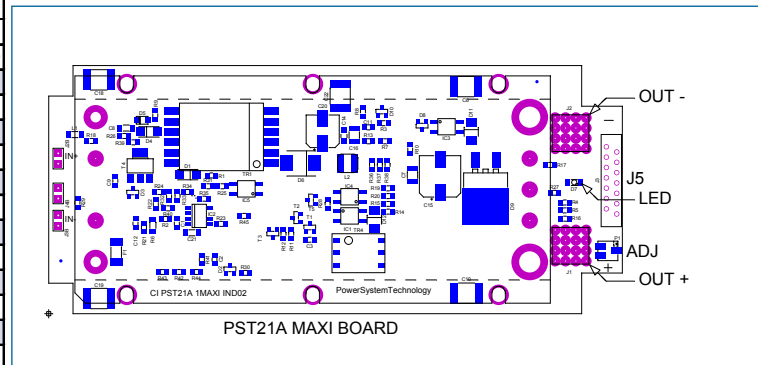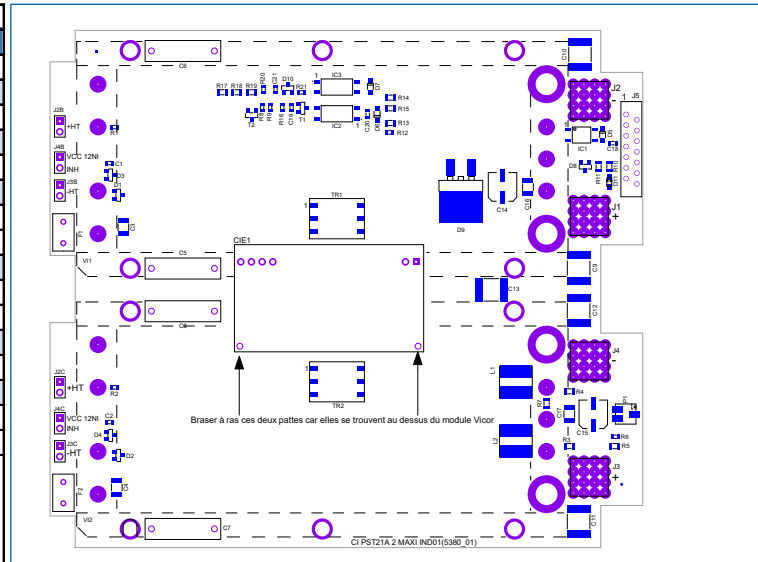

Safety & Installation

These converters are components, intended exclusively for integration into other equipment by an industrial assembly process or by a professionally competent person. Installation must strictly follow the safety regulations in respect of the enclosure, mounting, creepage and clearance distances, markings of the end-use application.

Connection to the system shall be made via the male connector Wurth.

The AC/L is internally fused. This fuse is designed to protect the converter against overcurrent caused by a failure, but may not be able to satisfy all requirements. External fuses in the wiring circuit to one or both input pins may be necessary to ensure compliance with local requirements.

Do not open the PSU, or the warranty will be invalidated. Make sure that there is sufficient thermal baseplate dissipation (max. temperature : 100°C). This should be verified by measuring the case of temperature at the specified measuring point, when the converter is operated in the end-use application.

Standards and Approvals

The converters are built to meet the safety standards IEC 62368-1, EN 62368-1.

'Built to meet' mentioned in the different paragraphs of the datasheet means that Power System Technology has designed the product to meet the standard but not certified it in a laboratory.

'Qualified' means that the test has been made in a certified laboratory.

Electric Strength

| Characteristic | | Input to Earth | Input to Output | Output to Earth | Output to Output | Unit |
|-----------------------|--|----------------|-----------------|-----------------|------------------|-------|
| Electric strength | Design strength | 1500 | 3000 | 500 | | Vrms |
| | Factory test for production units (>10s) | 2000 | 2000 | 500 | | Vdc |
| Insulation resistance | | | | > 100 | >100 | Mohms |

Temperatures

| Conditions | | Standard | | | T option | | | Unit |
|------------|--------------------------|----------|------|------|----------|------|------|------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| Ambiant | Operating (see derating) | -20 | | +71 | -40 | | +71 | °C |
| Heatsink | | -20 | | +100 | -40 | | +100 | |
| Storage | Not operating | -40 | | +125 | -40 | | +125 | |

In operation, there is no power derating as long as the baseplate temperature is in the indicated range.

Reliability

| MIL-HDBK-217F, notice 2 | Model | Heatsink Temp. | GB | GF |
|-------------------------|------------------|----------------|--------|--------|
| MTBF (Hours) | PST21A 3 outputs | 40°C | 285000 | 165000 |
| | | 70°C | 139500 | 82300 |
| | | 100°C | 86600 | 51000 |

MTBF calculation for a specific part number has to be ordered.



Cleaning Agents and Process

The converters are not hermetically sealed. In order to avoid possible damage, any penetration of liquids shall be avoided.

Isolation

The electric strength test is performed in the factory in accordance with IEC/EN 62368.

Options and configurations

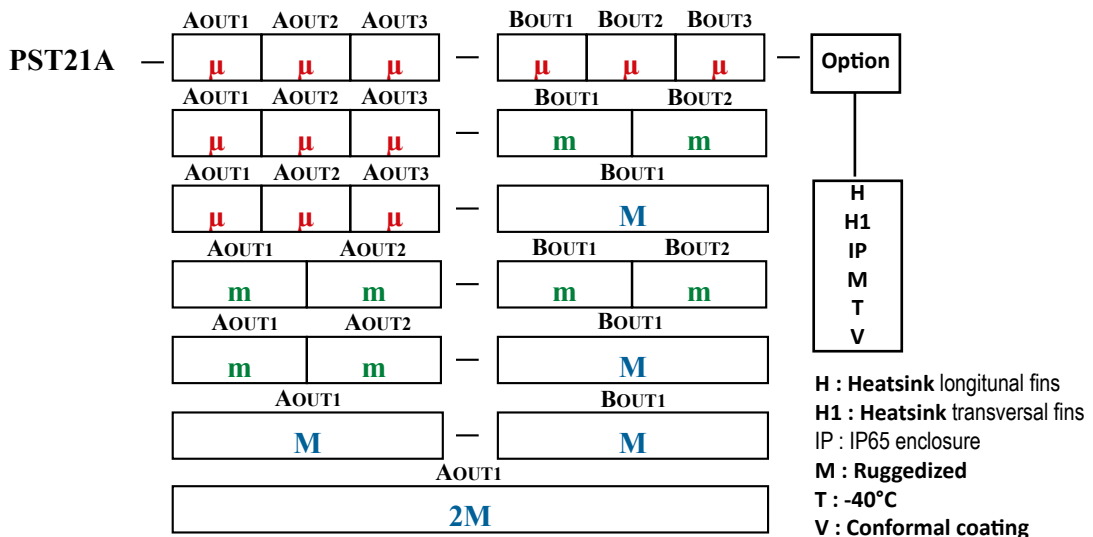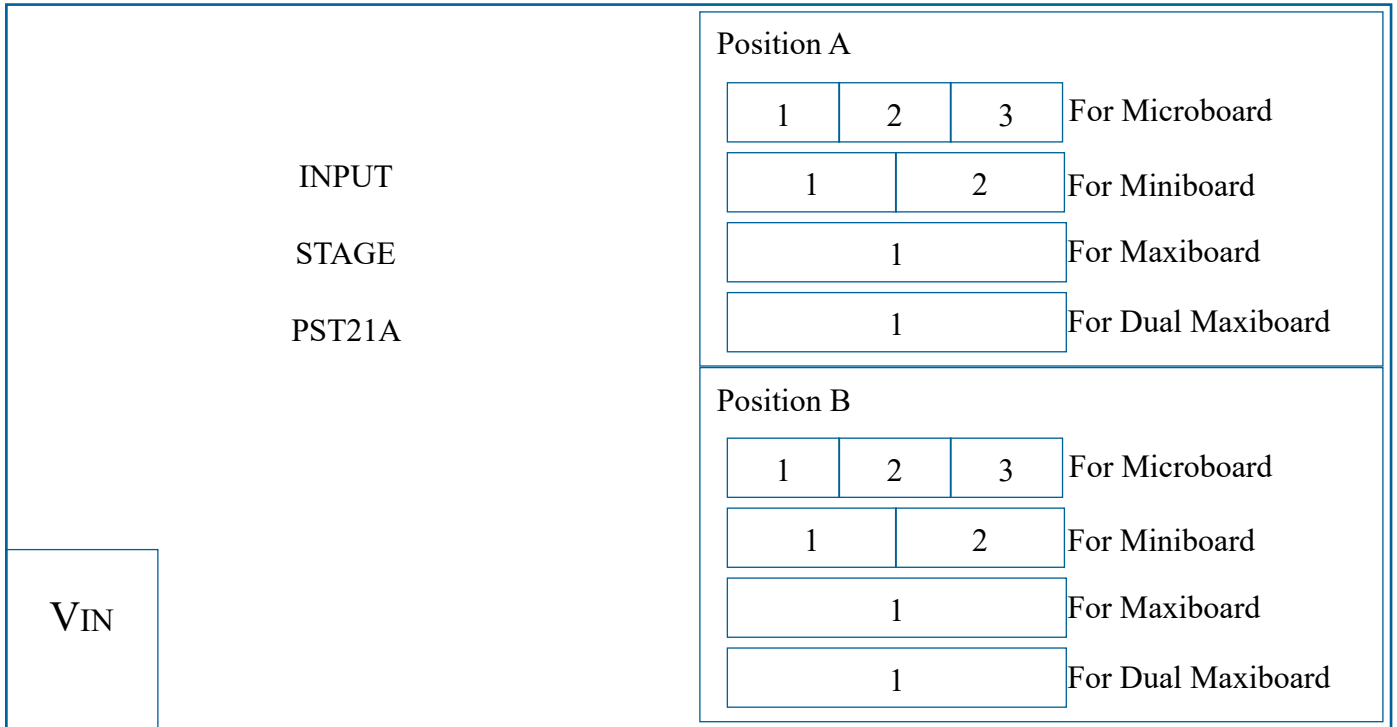

μ-μ-μ : Microboard Aout1,Aout2,Aout3 or Bout1,Bout2,Bout3 : Up to 3 outputs with micromodules from 2V to 48Vdc 150W (see table page 1)

Note: High current, low voltage outputs have to be placed on Aout3 or Bout3 in priority

| μ | | μ | | μ | |
|-----|---------|-----|---------|-----|---------|
| V | W | V | W | V | W |
| N | N | N | N | N | N |
| 2 | 50 | 2 | 50 | 2 | 50 |
| 3V3 | 50, 75 | 3V3 | 50, 75 | 3V3 | 50, 75 |
| 5 | 50, 100 | 5 | 50, 100 | 5 | 50, 100 |
| 8 | 100 | 8 | 100 | 8 | 100 |
| 12 | 75, 150 | 12 | 75, 150 | 12 | 75, 150 |
| 15 | 75, 150 | 15 | 75, 150 | 15 | 75, 150 |
| 24 | 75, 150 | 24 | 75, 150 | 24 | 75, 150 |
| 28 | 75, 150 | 28 | 75, 150 | 28 | 75, 150 |
| 36 | 75, 150 | 36 | 75, 150 | 36 | 75, 150 |
| 48 | 75, 150 | 48 | 75, 150 | 48 | 75, 150 |

M : Maxiboard Aout1 &/or Bout1: 1 output with maximodule from 2V to 54Vdc 600W (see table page 1)

| M | |
|-----|---------------|
| V | W |
| N | N |
| 2 | 160 |
| 3V3 | 200, 264 |
| 5 | 300, 400 |
| 8 | 300, 400 |
| 12 | 400, 600 |
| 15 | 400, 600 |
| 24 | 400, 600 |
| 28 | 400, 600 |
| 32 | 600 |
| 36 | 400, 500, 600 |
| 48 | 400, 600 |
| 54 | 600 |

m-m : Miniboard Aout1,Aout2 or Bout1,Bout2 : Up to 2 outputs with minimodules from 2V to 48Vdc 300W (see table page 1)

Note: High current, low voltage outputs have to be placed on Aout1 or Bout1 in priority

| m | | m | |
|-----|----------|-----|----------|
| V | W | V | W |
| N | N | N | N |
| 2 | 100 | 2 | 100 |
| 3V3 | 100, 150 | 3V3 | 100, 150 |
| 5 | 150, 200 | 5 | 150, 200 |
| 8 | 200 | 8 | 200 |
| 12 | 200, 300 | 12 | 200, 300 |
| 15 | 200, 300 | 15 | 200, 300 |
| 24 | 200, 300 | 24 | 200, 300 |
| 28 | 200, 300 | 28 | 200, 300 |
| 36 | 200, 300 | 36 | 200, 300 |
| 48 | 200, 300 | 48 | 200, 300 |

2M : Maxiboard Aout1 & Bout1: 1 output with maximodule from 2V to 54Vdc 1200W (see table page 1)

| 2M | |
|-----|-----------------|
| V | W |
| N | N |
| 2V | 320 |
| 3V3 | 400, 528 |
| 5 | 600, 800 |
| 8 | 600, 800 |
| 12 | 800, 1200 |
| 15 | 800, 1200 |
| 24 | 800, 1200 |
| 28 | 800, 1200 |
| 32 | 1200 |
| 36 | 800, 1000, 1200 |
| 48 | 800, 1200 |
| 54 | 1200 |

EMPTY SLOTS ARE FILLED WITH "NN"

Example :

PST21A-48150-48150-48150-48150-48150-48150-M (2 microboards with 6 outputs of 48V 150W with MIL-STD option)

PST21A-3V375-5100-12150-24300-28300 (1 microboard with 3 different outputs and 1 miniboard with 2 different outputs)